

# acA2040-25gm

The acA2040-25gm [Basler ace GigE camera](#) is equipped with an ams CMV4000 sensor.



## Specifications


### General Specifications

|                           | acA2040-25gm                                                                   |
|---------------------------|--------------------------------------------------------------------------------|
| Resolution (H x V Pixels) | 2048 × 2048                                                                    |
| Resolution                | 4 MP                                                                           |
| Sensor Type               | ams CMV4000-2E5M1BP<br>Progressive scan CMOS<br><a href="#">Global shutter</a> |
| Sensor Format             | 1"                                                                             |
| Effective Sensor Diagonal | 15.9 mm                                                                        |
| Pixel Size (H x V)        | 5.5 × 5.5 µm                                                                   |

|                                  | acA2040-25gm                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frame Rate (at Default Settings) | 25 fps                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Product Family                   | <a href="#">ace Classic</a>                                                                                                                                                                                                                                                                                                                          |
| Mono / Color                     | Mono                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Image Data Interface             | Fast Ethernet (100 Mbit/s)<br>Gigabit Ethernet (1000 Mbit/s)                                                                                                                                                                                                                                                                                                                                                                          |
| Pixel Formats                    | See <a href="#">Pixel Format</a> .                                                                                                                                                                                                                                                                                                                                                                                                    |
| Synchronization                  | Via hardware trigger<br>Via software trigger<br>Via free run                                                                                                                                                                                                                                                                                                                                                                          |
| Exposure Time Control            | Via hardware trigger<br>Programmable via the camera API                                                                                                                                                                                                                                                                                                                                                                               |
| Camera Power Requirements        | ≈3.1 W when using Power over Ethernet<br>≈2.6 W @ 12 VDC when supplied via I/O connector                                                                                                                                                                                                                                                                                                                                              |
| I/O Lines                        | 1 <a href="#">opto-coupled input line</a><br>1 <a href="#">opto-coupled output line</a>                                                                                                                                                                                                                                                                                                                                               |
| Lens Mount                       | C-mount                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Size (L x W x H)                 | 42.0 x 29 x 29 mm (without lens mount or connectors)<br>60.3 x 29 x 29 mm (with lens mount and connectors)                                                                                                                                                                                                                                                                                                                            |
| Weight                           | <90 g                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Conformity                       | CE (includes RoHS), EAC, UKCA, UL Listed, FCC, GenICam, GigE Vision, IP30, IEEE 802.3af (PoE), REACH, KC<br><a href="#">Certificates for your camera model</a> <br>For more information, see the <a href="#">Compliance</a>  section of the Basler website. |

|                          | acA2040-25gm                                                                                                                                             |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Software                 | <a href="#">Basler pylon Software Suite</a> <a href="#">↗</a> (version 4.0 or higher)<br>Available for Windows, Linux x86, Linux ARM, macOS, and Android |
| Accessories              | <a href="#">Accessories for your camera model</a> <a href="#">↗</a>                                                                                      |
| Availability and Pricing | See the <a href="#">product page</a> <a href="#">↗</a> on the Basler website.                                                                            |


## Spectral Response

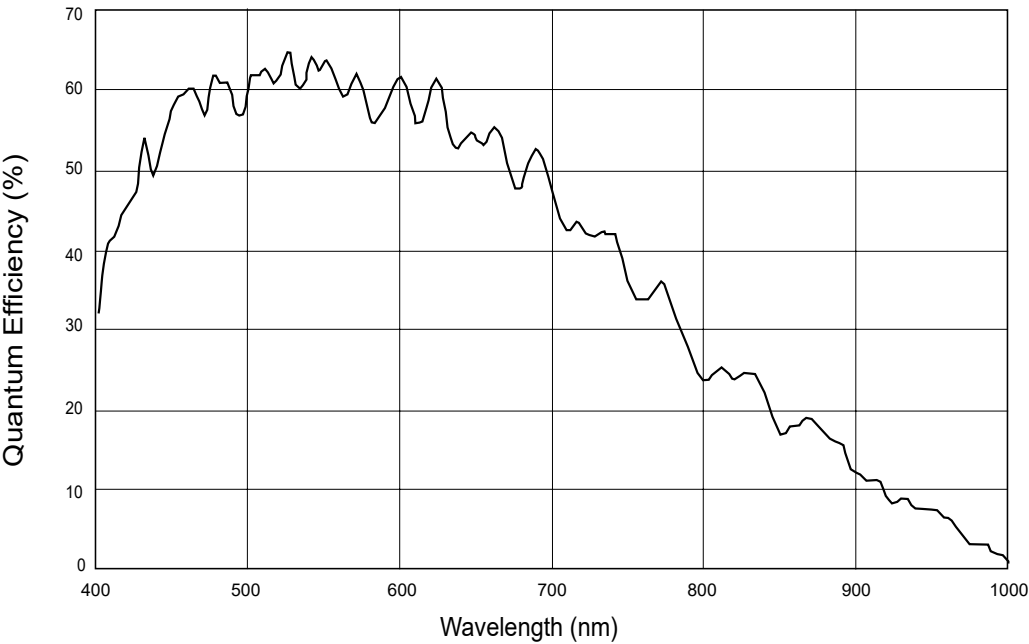

The spectral response curve excludes lens characteristics and light source characteristics.

## Mechanical Specifications

### Camera Dimensions and Mounting Points

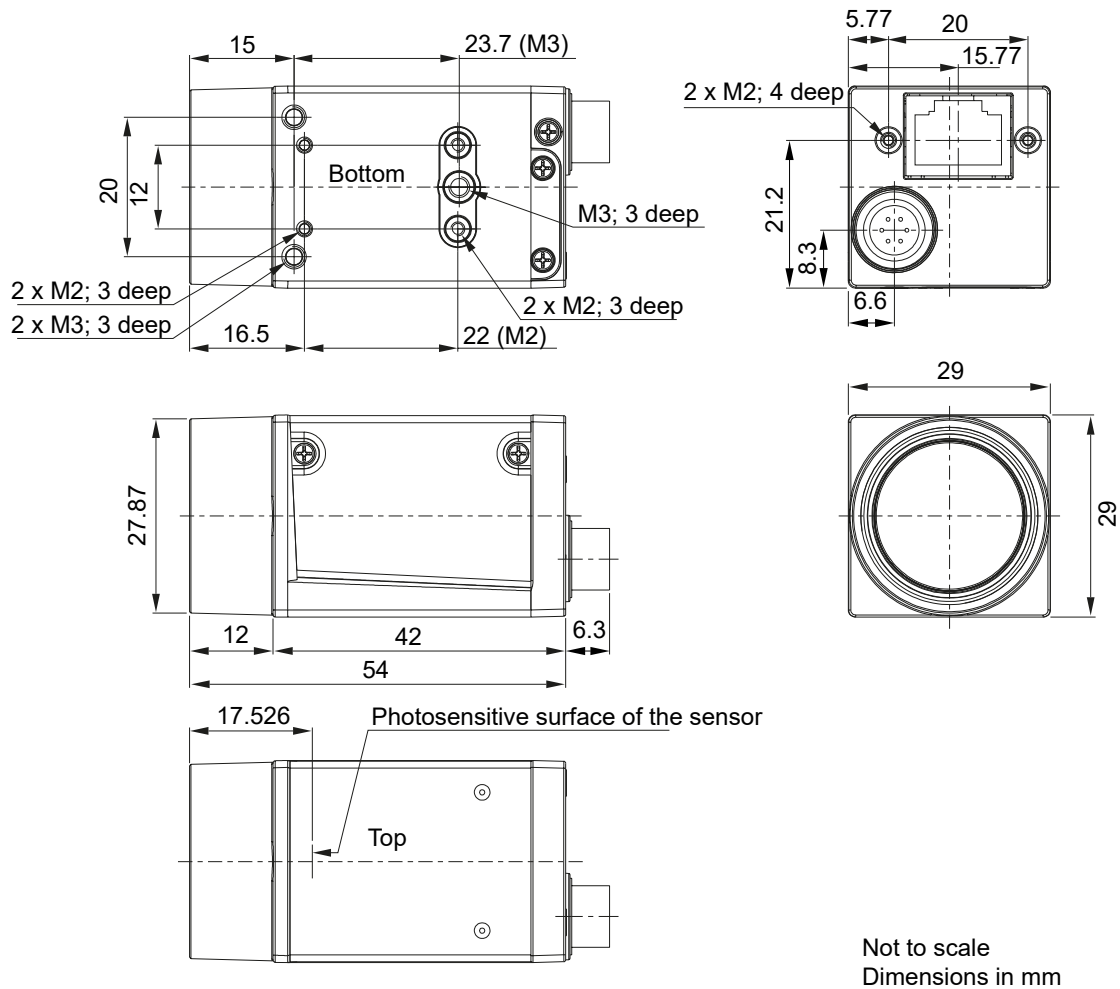

→ Download the [CAD/technical drawing for your Basler camera](#) [↗](#).

## Maximum Allowed Lens Intrusion

→ [See Maximum Allowed Lens Intrusion.](#)

## Stress Test Results

→ [See Stress Test Results.](#)

## Requirements

### Environmental Requirements

## Temperature and Humidity

| Housing temperature during operation        | 0–50 °C (32–122 °F)               |
|---------------------------------------------|-----------------------------------|
| Humidity during operation                   | 20–80 %, relative, non-condensing |
| Storage temperature                         | –20–80 °C (–4–176 °F)             |
| Storage humidity                            | 20–80 %, relative, non-condensing |
| Housing temperature according to UL 60950-1 | max. 70 °C (158 °F)               |
| Ambient temperature according to UL 60950-1 | max. 30 °C (86 °F)                |

## Heat Dissipation

→ See [Providing Heat Dissipation](#).

## Electrical Requirements



### **WARNING – Electric Shock Hazard**



Unapproved power supplies may cause electric shock. Serious injury or death may occur.

- You must use power supplies that meet the Safety Extra Low Voltage (SELV) and Limited Power Source (LPS) requirements.
- If you use a powered hub or powered switch, they must meet the SELV and LPS requirements.



#### WARNING – Fire Hazard



Unapproved power supplies may cause fire and burns.

- You must use power supplies that meet the Limited Power Source (LPS) requirements.
- If you use a powered hub or powered switch, they must meet the LPS requirements.



#### NOTICE – Incorrect voltage can damage the camera.



You must supply camera and I/O power within the safe operating voltage ranges specified below.

Do not use negative voltage for an I/O line.

## Camera Power



#### NOTICE – Dual camera power supply can damage the camera.



You must supply camera power **either** via Power over Ethernet (PoE) **or** via the camera's I/O connector.

Do not use both ways of supplying camera power at the same time.

- **Power supply via Power over Ethernet (PoE):** Power must comply with the IEEE 802.3af specification.
- **Power supply via I/O connector:** The nominal operating voltage is 12 VDC (10.8 VDC minimum, 13.2 VDC maximum), includes <1 % ripple.

## Opto-Coupled I/O Input Line

| Voltage  | Description                                                                                                   |
|----------|---------------------------------------------------------------------------------------------------------------|
| 30 VDC   | Absolute maximum. This voltage must never be exceeded. Doing so may damage the camera and voids the warranty. |
| 0–24 VDC | Safe operating range.                                                                                         |

| Voltage          | Description                                                                                      |
|------------------|--------------------------------------------------------------------------------------------------|
| 0–1.4 VDC        | Indicates a logical 0 (with inverter disabled).                                                  |
| >1.4–<br>2.2 VDC | Region where the logic level transition occurs; the logical state is not defined in this region. |
| >2.2 VDC         | Indicates a logical 1 (with inverter disabled).                                                  |

- **Minimum current:** 5 mA
- **Current draw:** 5–15 mA
- If the camera is connected to a PLC device, Basler recommends using a cable that adjusts the voltage level of the PLC to that of the camera.

## Opto-Coupled I/O Output Line

| Voltage        | Description                                                                                                   |
|----------------|---------------------------------------------------------------------------------------------------------------|
| 30 VDC         | Absolute maximum. This voltage must never be exceeded. Doing so may damage the camera and voids the warranty. |
| 3.3–<br>24 VDC | Safe operating range.                                                                                         |
| <3.3 VDC       | Unreliable I/O output.                                                                                        |

- **Leakage current:** <60  $\mu$ A. Actual leakage depends on operating temperature and production spread of electronic components.
- **Maximum load current:** 50 mA
- **Minimum load current:** Not specified. Consider the following:
  - Leakage current will have a stronger effect when load currents are low.
  - Propagation delay of the output increases as load currents decrease.
  - Higher-impedance circuits tend to be more susceptible to EMI.
  - Higher currents cause higher voltage drops in long cables.

For more information about the I/O lines, see the [I/O Control](#) section.

## Circuit Diagrams

→ See [Circuit Diagrams](#).

## Cable Requirements

### Ethernet Cable

- Use a high-quality Ethernet cable. Use of shielded Cat 5e or better cables with S/STP shielding is recommended.
- Use either a straight-through (patch) or a cross-over Ethernet cable.
- Proximity to strong magnetic fields should be avoided.
- Basler recommends using Ethernet cables from the [Basler cable portfolio](#) 


### I/O Cable

- The I/O cable must be shielded.
- The I/O cable must have a cross-section of at least 0.14 mm<sup>2</sup> (close to AWG26).
- Use a twisted pair wire cable.
- Maximum recommended cable length: 10 m
- Camera-side connector: Hirose micro plug (part number HR10A-7P-6S) or equivalent
- Proximity to strong magnetic fields should be avoided.
- If you are supplying power to the camera via Power over Ethernet, the I/O cable will not be used to supply power. However, you can still use the cable to connect to the I/O lines.
- Basler recommends using I/O cables from the [Basler cable portfolio](#) 
  - [Opto-I/O cable, 10 m](#)  (blue cable): For use with the [opto-coupled I/O lines](#) of your camera. Does not provide camera power. Therefore, when using this cable, you must provide power via Power over Ethernet (PoE).
  - [Power-I/O cable, 10 m](#)  (gray cable): For use with the [opto-coupled I/O lines](#) of your camera. Unlike the opto-I/O cable (blue cable, see above), this cable provides camera power.

- [Opto-GPIO Y-cable, 2 × 10 m](#) (yellow-blue cable): Offers two separate wires. One can be used to connect the [opto-coupled I/O lines](#) of your camera. The other one can be used to provide camera power.
- [Power-I/O PLC+ cable, 10 m](#) (gray cable): For use with the [opto-coupled I/O lines](#) of Basler cameras connected to a programmable logic controller ([PLC](#)). It adapts the signal level for zero voltage from PLC level (<8.4 VDC) to TTL level (<1.4 VDC).

## Physical Interface

### Camera Connectors

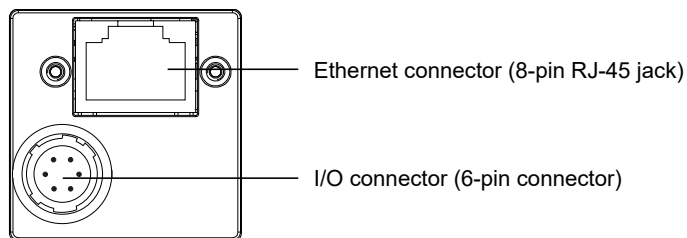


### Ethernet Connector

- 100/1000 Mbit/s Ethernet connection to the camera
- If power is not supplied via I/O connector: Power over Ethernet (PoE)
- 8-pin RJ-45 jack
- Recommended mating connector: 8-pin RJ-45 plug (snap-in or with locking screws)
- When using locking screws, note the horizontal orientation of the screws.

### I/O Connector

- If power is not supplied via Power over Ethernet (PoE): Power supply
- Hirose micro receptacle (part number HR10A-7R-6PB)
- Recommended mating connector: Hirose micro plug (part number HR10A-7P-6S)

### Connector Pinout

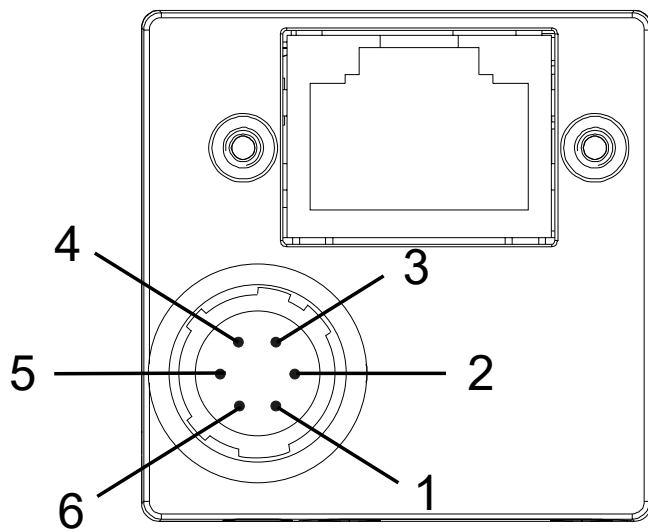

| Pin | Line   | Function                          |
|-----|--------|-----------------------------------|
| 1   | -      | 12 VDC camera power               |
| 2   | Line 1 | Opto-coupled I/O input line       |
| 3   | -      | Not connected                     |
| 4   | Out 1  | Opto-coupled I/O output line      |
| 5   | -      | Ground for opto-coupled I/O lines |
| 6   | -      | Ground for camera power           |

## Precautions

→ See [Safety Instructions \(ace, ace 2, racer 2 S\)](#).

## Installation

→ See [Camera Installation](#).

# Features

→ See [Features.](#))