


Basler USB Interface Card, 4HC, 5G, 4 Port

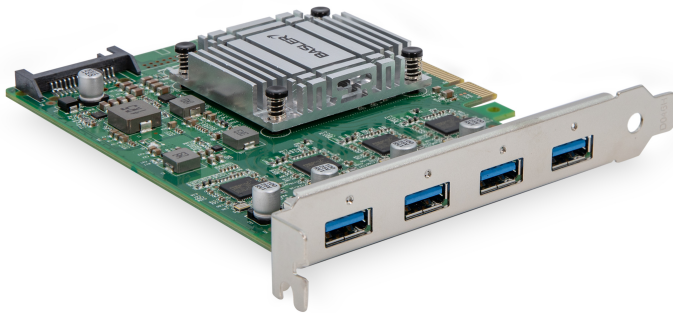

Key Features


- USB Vision-certified
- Up to 5Gb/s per host controller, 20Gb/s in total
- Contains four host controllers and four ports
- Backward compatible with USB 2.0
- The USB card has voltage, current overload and short circuit protection

General Specifications

USB Interface Card, 4HC, 5G, 4 Port	
Order Number	2200002207

	USB Interface Card, 4HC, 5G, 4 Port
Number of Ports	4
Port	USB Type-A
Additional Low-Profile Bracket	No
PCIe Version and Lane	2.0 x4 (compatible with x8/x16)
Conformity	CE, UKCA, FCC, KC Certificates for your USB Interface Card  For more information, see the Compliance  section of the Basler website.
Output Voltage (per port)	5 V (± 5 %)
Current Limit Range (per port)	2000 mA (± 5 %)
USB Power Delivery Capacity (in total)	Max. 50 W
Host Controllers	4 x Fresco Logic FL1100EX

USB Interface Card Dimensions

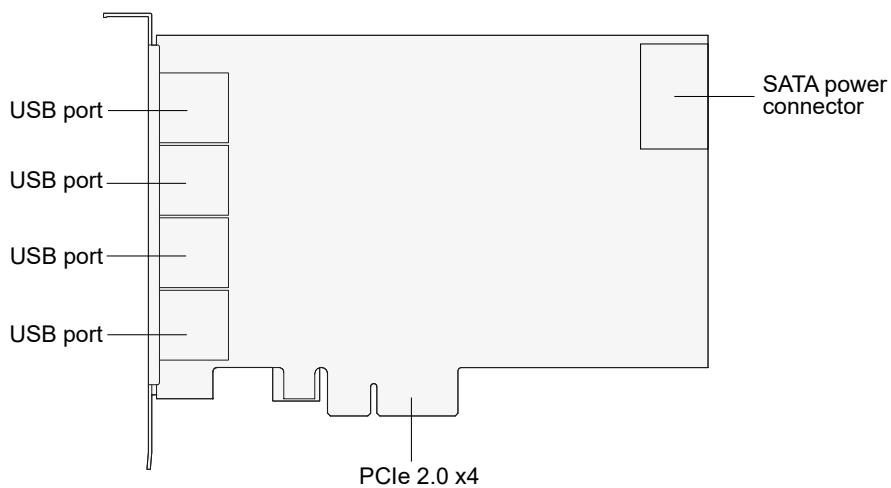

Environmental Requirements

The Basler USB Interface Cards are specified for indoor use only.

Operating Temperature	0–85 °C (32–185 °F)
Storage Temperature	–20–70 °C (–4–158 °F)
Humidity	20–80 % relative humidity, non-condensing

Allow sufficient air circulation to keep the temperature during operation below 85 °C (185 °F). Additional cooling devices are not normally required, but should be provided if necessary.

Installation

→ See [Hardware Installation](#).